
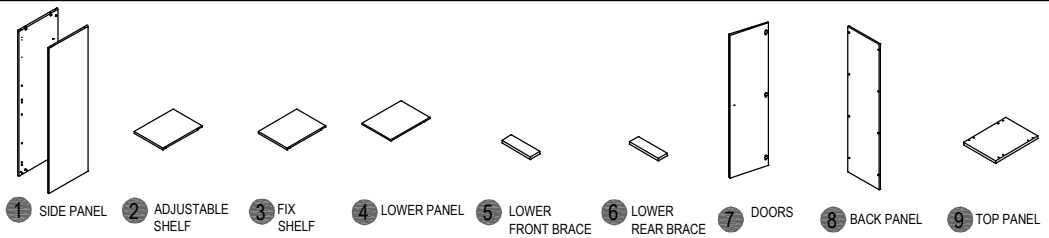



ASSEMBLING INSTRUCTION

COMPONENTS

MARTIN® SERIES



HARDWARE

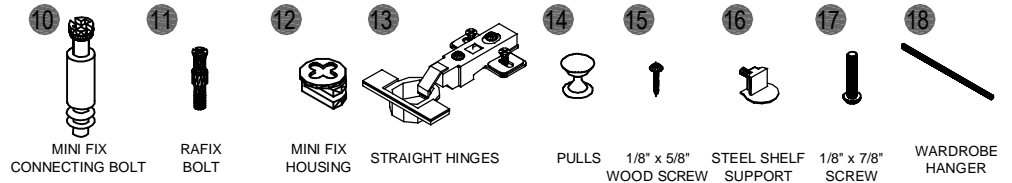

HIGH STORAGE & WARDROBE CABINET

FORMCASE®
FORMING A BETTER WORKPLACE
www.formcase.com

INSTALLING BODY

TOOL REQUIRED :
- PHILLIPS HEAD SCREW DRIVER AND FLAT HEAD SCREW DRIVER

Step 1
Attach the mini fix connecting bolt into the nylon sockets provided in each panel.

Step 2
a. Attach the front / rear lower braces to the side panel.
b. Attach lower brace to the side panel.
c. Tighten all the mini fix housings.

Step 3
Attach another side panel to the pre-assembled components and tighten all the mini fix housings.

Step 4
Attach the back panel to the pre-assembled components and tighten all the mini fix housings.

Step 5
Attach the back panel to the pre-assembled components and tighten all the mini fix housings.

Step 6 (2418 HWC)
a. Put the steel shelf support pin into the predrilled holes at the side panels

Step 7
a. Install WARDROBE HANGER by using 1/8" x 5/8" SCREW
NOTE :
- STEP 7 NOT REQUIRED FOR INSTALLING 2418 HSC

Step 6 (2418 HSC)
a. Attach the rafx bolt to the pre - drilled holes at the side panels
b. Attach the shelf with rafx housing to the side panel, tighten the rafx bolt.

INSTALLING DOORS

Step 1
a. Attach the hinges to the doors.
(see detail 1)

Step 2
Attach the doors to the cabinet's body.

Step 3
Align the doors by adjust the hinges

Step 4
Attach the pulls to the doors by using 1/8" x 7/8" screws.

Clip on features
All of the Formcase products use clip on hinges. Once the doors is attached to the cabinet / hutch, the doors can be easily removed or reinstalled without using a tool.

How to remove a clip on hinge?
Simply push the clip, located near the side panel and pull out the doors.

How to reinstall a clip on hinge?
Position the clip to the part of the hinge at the side panel, and then push the door to reconnect the hinge.